


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

LTR.	REVISIONS	DATE	INT.
A	ADDED TORQUE SPECIFICATION	01-21-14	BRH
B	ADDED SUB-ASSEMBLY NOTE	02-23-15	BRH
C	REMOVED SUB-ASSEMBLY NOTE P/N 73886	02-04-16	RAS
D	REPLACED P/N 3842-002 WITH P/N 3842-005	03-29-16	RAS
E	UPDATED ELECTRICAL VALUES	01-03-17	RAS

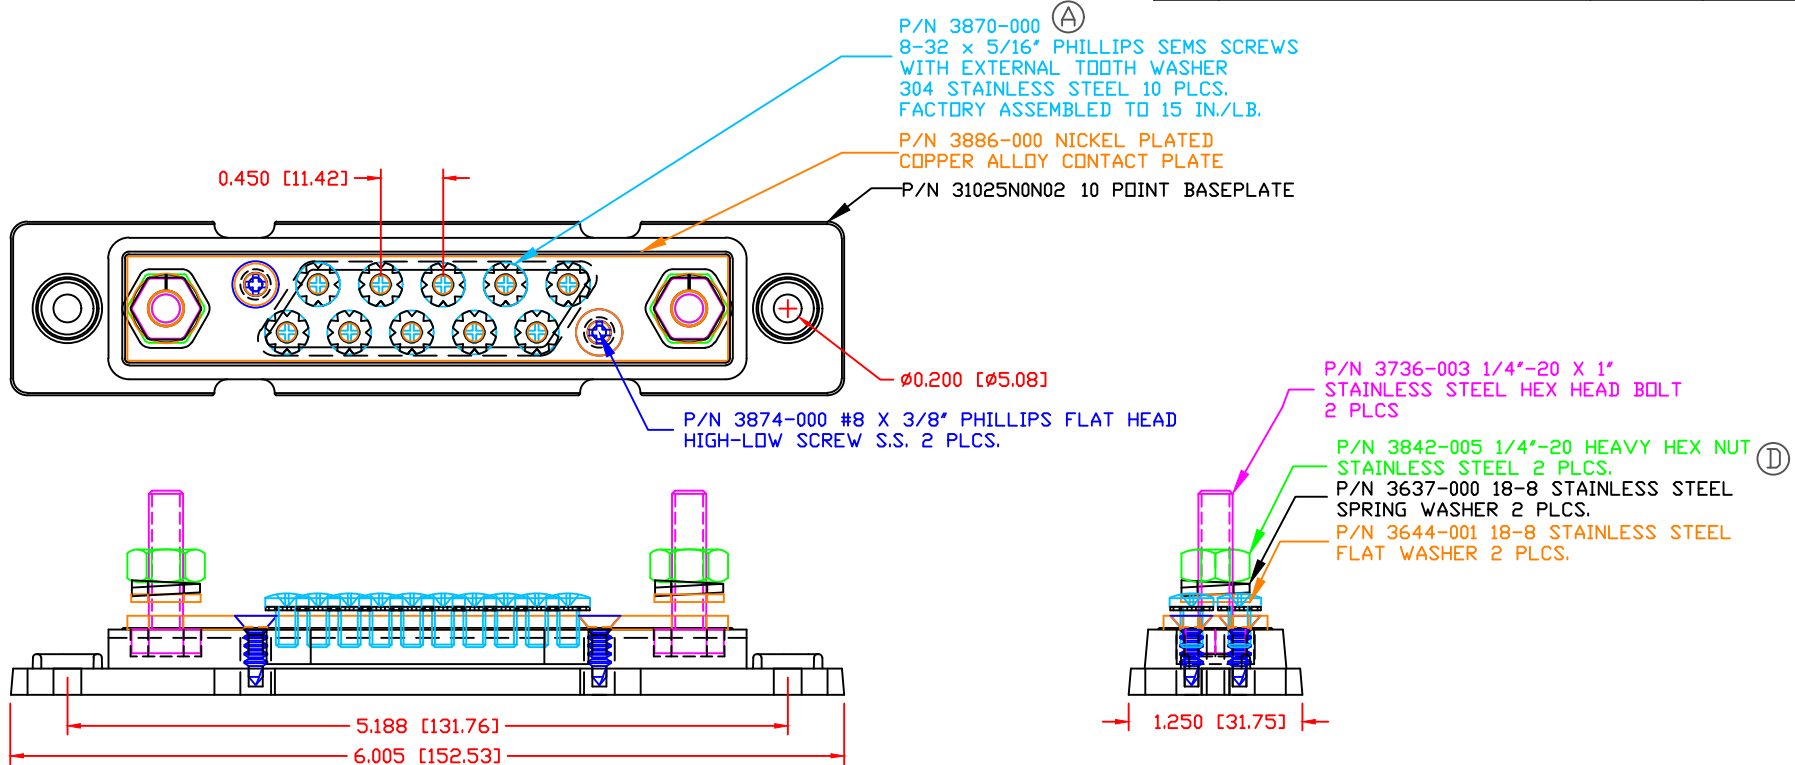

SCALE FACTOR : NONE
 ALL DIMENSIONS GIVEN AS: in [mm]
 TOLERANCES UNLESS OTHERWISE SPECIFIED :
 MOLDED PARTS: ±0.30" [±0.8mm]
 HARDWARE ITEMS: ±0.10" [±0.25mm]

MATERIAL PART NO: 7111210502
 MATERIAL: GLASS FILLED NYLON
 VENDOR PART NO: NYLON N2015 HL NAT
 SPECIFIC GRAVITY: 1.23
 MELTING TEMP: 515 F [268 C]
 U.L. RATING: UL 94 HB

#8 SCREWS FACTORY INSTALLED TO 15 IN-LBS
 MAXIMUM RECOMMENDED AMPERAGE: 150 A @12VDC (20A X 10 PLCS)
 MAXIMUM RECOMMENDED VOLTAGE: 48VDC

VTE Incorporated

5437 Robinson Road, P.O. Box 790
 Pellston, Michigan 49769
 Telephone: 1-800-527-9256, 231-539-8000
 FAX: 231-539-0914

REF:	DATE:	DRN BY: BRH	WEIGHT:
CUSTOMER DIMS	09-11-06	CHK'D BY: BRH	
TITLE: 10 POINT BUS STRIP WITH 2-1/4" POSTS			SCALE:
MATERIAL:		PART NO.	
		771025N0N02	
COLOR:	DRG CLASS	REV E	